



Member State of OIML  
United Kingdom of Great Britain  
and Northern Ireland

OIML Certificate No  
R61/2004-GB1-06.01

## OIML CERTIFICATE OF CONFORMITY

Issuing authority

Name: **National Weights and Measures Laboratory**  
Address: **Stanton Avenue  
Teddington  
Middlesex  
TW11 0JZ  
United Kingdom**

Person responsible:

**P Dixon**  
**Business Team Manager Type Approval & Testing**

Applicant

Name: **Prins UK Ltd**  
Address: **Unit 140  
Hartlebury Trading Estate  
Kidderminster  
Worcestershire  
DY10 4JB  
United Kingdom**

Manufacturer of the certified pattern is the Applicant

Identification of the certified pattern: **PN Series Weigher**  
**Further characteristics see page 2**

This certificate attests the conformity of the above-mentioned pattern (represented by the samples identified in the associated test report) with the requirements of the following Recommendation of the International Organisation of Legal Metrology (OIML):

**OIML: R61**  
**Edition: 2004 (E)**  
**Reference accuracy class: Ref (0.5)**

This certificate relates only to the metrological and technical characteristics of the pattern of the instrument concerned, as covered by the relevant OIML International Recommendation.

OIML Certificate No  
R61/2004-GB1-06.01

This certificate does not bestow any form of legal international approval.


The conformity was established by tests described in the associated test report number TR: 0504 which includes 54 pages.

Issuing authority

CIML member



Mr P R Dixon  
for NWML

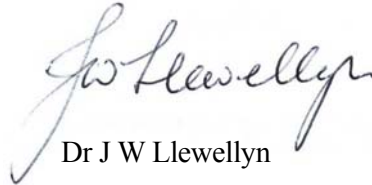

Dr J W Llewellyn

Date 24<sup>th</sup> March 2006

Ref: T1137/0002

Characteristics: Mains powered automatic gravimetric filling instrument designated PN - Series.

Reference accuracy class	X(x)	$\geq 0.5$
Maximum capacity	Max	$\leq 4000d$
Minimum capacity	Min	$\geq 250g$ (Class X(1))
		$\geq 500g$ (Class X(0.5))
Scale interval	d	$\geq 0.5 g$
Average number of loads per fill		$\geq 4$
Rated minimum fill	Minfill	$\geq$ number of loads per fill x Min
Power supply		230 V ac 50/60 Hz
Operating temperature range		-10 °C to +40 °C

Note: The actual class for each type of product (equal to or greater than the reference value) shall be determined by compliance with the metrological requirements at initial verification.

Important note: Apart from the mention of the certificates reference number and the name of the OIML Member State in which the certificate was issued, partial quotation of the certificate or of the associated test report is not permitted, though they may be reproduced in full.