



OIML Member State
SLOVAKIA

OIML Certificate No.
R49/2013-A-SK1-23.02 Rev. 3

OIML CERTIFICATE ISSUED UNDER SCHEME A

OIML Issuing Authority

Name: **Slovak Legal Metrology (SLM)**
Address: Geologická 9966/1,
821 06 Bratislava-Podunajské Biskupice, Slovakia
Product Certification Body
Hviezdoslavova 31
974 01 Banská Bystrica, Slovakia
Person responsible: Ing. Dušan Šmigura, PhD., Director of PCB

Applicant

Name: **UAB „Axioma Metering“**
Address: Veterinaru str. 52, Biruliskes,
LT-54469 Kaunas region,
Lithuania

Manufacturer

Name: **UAB „Axioma Metering“**
Address: Veterinaru str. 52, Biruliskes,
LT-54469 Kaunas region,
Lithuania

Identification of the certified type *(the detailed characteristics are defined in the additional pages)*


Water meter type **Qalcosonic W1**

Designation of the module *(if applicable)*

Ultrasonic water meters with electronic indication device

This OIML Certificate attests the conformity of the above identified type (represented by the sample(s) identified in the OIML type evaluation report) with the requirements of the following Recommendation of the International Organization of Legal Metrology (OIML):

OIML R 49, Edition (year): 2013
For accuracy class (if applicable): 2



This OIML Certificate relates only to metrological and technical characteristics of the type of measuring instrument covered by the relevant OIML Recommendation identified above.

This OIML Certificate does not bestow any form of legal international approval.

The conformity was established by the results of tests and examinations provided in the associated OIML type evaluation report:

No. 2025/ER006/SK1 dated 28st January 2025 that includes 17 pages.

The technical documentation relating to the identified type is contained in documentation file name:

Technical documentation files:

- AXIOMA_Qalcosonic W1_00“ dated 13th January 2023 that includes 114 pages.
- AXIOMA_Qalcosonic W1_03“ dated 28st January 2025 that includes 51 pages.


OIML Certificate History

Revision No.	Date	Description of the modification
0	13 th January 2023	Certificate first issued
1	25 th May 2023	Point 2.4 Software specification – supplemented specification for all DNs separately
2	31 st May 2024	Issued updated Evaluation Report No: 2022/ER010/SK1 Rev. 1
3	28 st January 2025	Add design B (DN15 and DN20) Changed address of the issuing authority SLM on the EU-type examination certificate

Identification, signature and stamp

The OIML Issuing Authority




.....

Dušan Šmigura

Date: 28st January 2025

Important note: Apart from the mention of the Certificate’s reference number and the name of the OIML Member State in which the Certificate is issued, partial quotation of the Certificate and of the associated OIML type evaluation report(s) is not permitted, although either may be reproduced in full.

1. Designation

The ultrasonic water meter type QALCOSONIC W1 is designed to measure, memorise and display the volume of water passing through the measurement transducer at metering conditions. The water meter is intended for the measurement of volume of clean water in residential use and is intended for non-resettable measurements between two constant partners.

The water meter type QALCOSONIC W1 is compact ultrasonic water meter with electronic indication device. The measurement is based on ultrasonic measurement method, bidirectional transit-time principle. Ultrasonic signal moves along the measuring section many times and the flow downstream between the ultrasonic sensors have to perform transmitter and receiver functions. From the results of time difference the flow rate is calculated and indicated in display.

The water meter type QALCOSONIC W1 can be installed to operate in horizontal and vertical positions and is not designed to measure the reverse flow.

The water meter QALCOSONIC W1 is produced in A design (for all DN's) and design B (for DN15 and DN20 only).

The difference between A design and B design lies solely in the external appearance. The measurement section is identical.

2. Description

2.1 Parts of the water meter type QALCOSONIC W1

Essential parts of the water meter:

- Flow sensor:
 - the plastic cylindrical brass body with inlet and outlet firmly connected with the plastic housing for the calculator;
 - the inner plastic element with two mirrors (four mirrors for DN40) (sound path) placed in the cylindrical plastic body;
 - two ultrasonic transducers (four for DN40) placed on the upside of the cylindrical plastic body.
- Calculator and indication device:
 - the plastic housing of the calculator with indication device directly mounted on the flow sensor;
 - the PCB boards - tree PCB and one PCB with calculator;
 - the electronic LCD display with 2-lines:
 - o upper line with 9 digits and indication range of 999999.999 m³. The sub-multiples of a cubic meter are indicated on the LCD display by tree smaller digits after decimal point;
 - o bottom line with 5 digits to display the current flow rate in m³/h.
 - non-replaceable lithium batteries, life 16 years. The end of battery life is visible on plate of water meter.
 - Batteries:
 - o for DN15, DN20, DN25, DN32 two internal batteries „AA:size“;
 - o for DN15 and DN15 B design, DN20 and DN20 B design, DN25, DN32: two internal batteries „AA“ size + one „A23“;
 - o For DN15 B design, DN20 B design one internal battery “C” size + one “A23”;
 - o for DN40 one internal battery „D“ size;
 - for DN40 one internal battery „D“ size + one “A23”.

Non-essential parts of the water meter:

- antenna;
- non-return valve – optionally.

2.2 Metrological functions

- measuring, memorizing and displaying the volume of water passing through the water meter.

2.3 Operation and presentation of legal data

- a) the total measured volume (m³);
- b) flow rate (m³/h).

The following displays are available by the configuration program "W1 TOOL":

- forward flow volume;
- volume of total reverse flow;
- water temperature value;
- date;
- real time;
- status error code;
- accumulated volume on set day and time;
- segment tests – full screen;
- segment test – blank screen;
- user indication number;
- control number;
- verification mode.

2.4 Software specification

Software versions	Checksum	Remarks
1.03	C983	DN15, DN20, DN25, DN32
1.03	F897	DN15 B design, DN20 B design
2.02	CD00	DN40

The software version is indicated on the data plate in the form SW:1.03 (SW: 2.02).

The checksum is indicated on the data plate in the form C983 (F897, CD00).

2.5 Accountable alarms

During the measuring process the calculator and indication device detects automatically if a fault condition occurs and eventually stops the measurement reporting an alarm indication on the display. See user manual issued by the manufacturer.

2.6 Integrated equipment and functions

- Integrated RF transceiver, Wireless M-Bus, LoRa, NFC, Radio NB IoT;
- meters are equipped with Renesas RF10WMGAFB MCU (128 KB) or Renesas R5F111PJGFB MCU (256 KB).

Via the parts listed in the point 2.6 no legally relevant data shall be altered. Data transferred via these parts do not influence metrological relevant data.



3. Technical and metrological data

Tab. 1

Type /model	<i>QALCOSONIC W1</i>											
Nominal diameter DN	mm	15										
Permanent flowrate Q ₃	m ³ /h	1,6					2,5					
Minimum flowrate Q ₁	m ³ /h	0,020	0,010	0,0064	0,005	0,004	0,031	0,0156	0,010	0,0062	0,0031	
Transitional flowrate Q ₂	m ³ /h	0,032	0,016	0,010	0,008	0,0064	0,050	0,025	0,016	0,010	0,005	
Overload flowrate Q ₄	m ³ /h	2					3,125					
Ratio Q ₃ /Q ₁	-	80	160	250	315	400	80	160	250	400	800	
Ratio Q ₂ /Q ₁	-	1,6										
Connection thread	-	G ¾										
Construction length L	mm	80, 105, 110, 115, 165, 170										
Installation position	-	Horizontal / Vertical										
Water temperature range	°C	0,1 to 30 0,1 to 50 30 to 70 0,1 to 70										
Meter temperature class	-	T30 T50 T30/70 T70										
Maximum working pressure MAP	bar	16										
Pressure loss class ΔP	bar	0,16					0,25					
Maximum permissible error in upper flowrates range Q ₂ ≤ Q ≤ Q ₄	%	± 2 (at θ ≤ 30°C) ± 3 (at θ > 30°C)										
Maximum permissible error in lower flowrates ranges Q ₁ ≤ Q < Q ₂	%	± 5										
Scale interval	m ³	0,001										
Scale interval in testing mode	m ³	0,000001										
Capacity of calculator	m ³	999999,999										
Capacity of calculator in testing mode	m ³	999,999999										
Accuracy class	-	2										
Mechanical class	-	M1										
Climatic class	°C	-15 to +70										
Electromagnetic class	-	E2										
Environmental classification	-	B/O										
Flow profile sensitivity class	-	U0D0										
Battery	-	li-battery 3,6 V, life time 16 years										



Tab. 2

Type /model		<i>QALCOSONIC W1</i>								
Nominal diameter DN	mm	20								
Permanent flowrate Q ₃	m ³ /h	2,5				4				
Minimum flowrate Q ₁	m ³ /h	0,031	0,0156	0,010	0,0062	0,050	0,025	0,016	0,010	0,005
Transitional flowrate Q ₂	m ³ /h	0,05	0,025	0,016	0,010	0,080	0,040	0,026	0,016	0,008
Overload flowrate Q ₄	m ³ /h	3,125				5				
Ratio Q ₃ /Q ₁	-	80	160	250	400	80	160	250	400	800
Ratio Q ₂ /Q ₁	-	1,6								
Connection thread	-	G 1								
Construction length L	mm	105, 110, 130, 165, 190								
Installation position	-	Horizontal / Vertical								
Water temperature range	°C	0,1 to 30 0,1 to 50 30 to 70 0,1 to 70								
Meter temperature class	-	T30 T50 T30/70 T70								
Maximum working pressure	bar	16								
Pressure loss ΔP	bar	0,16				0,25				
Maximum permissible error in upper flowrates range Q ₂ ≤ Q ≤ Q ₄	%	± 2 (at θ ≤ 30°C) ± 3 (at θ > 30°C)								
Maximum permissible error in lower flowrates ranges Q ₁ ≤ Q < Q ₂	%	± 5								
Scale interval	m ³	0,001								
Scale interval in testing mode	m ³	0,000001								
Capacity of calculator	m ³	999999,999								
Capacity of calculator in testing mode	m ³	999,999999								
Accuracy class	-	2								
Mechanical class	-	M1								
Climatic class	°C	-15 to +70								
Electromagnetic class	-	E2								
Environmental classification	-	B/O								
Flow profile sensitivity class	-	U0D0								
Battery	-	li-battery 3,6 V, life time 16 years								



Tab. 3

Type /model	<i>QALCOSONIC W1</i>									
Nominal diameter DN	mm	25								
Permanent flowrate Q ₃	m ³ /h	6,3				10				
Minimum flowrate Q ₁	m ³ /h	0,079	0,040	0,252	0,016	0,125	0,0625	0,040	0,025	
Transitional flowrate Q ₂	m ³ /h	0,126	0,063	0,040	0,026	0,200	0,100	0,064	0,040	
Overload flowrate Q ₄	m ³ /h	7,875				12,5				
Ratio Q ₃ /Q ₁	-	80	160	250	400	80	160	250	400	
Ratio Q ₂ /Q ₁	-	1,6								
Connection thread	-	G 1 ¼								
Construction length L	mm	260								
Installation position	-	Horizontal / Vertical								
Water temperature range	°C	0,1 to 30 0,1 to 50 30 to 70 0,1 to 70								
Meter temperature class	-	T30 T50 T30/70 T70								
Maximum working pressure	bar	16								
Pressure loss ΔP	bar	0,25				0,63				
Maximum permissible error in upper flowrates range Q ₂ ≤ Q ≤ Q ₄	%	± 2 (at θ ≤ 30°C) ± 3 (at θ > 30°C)								
Maximum permissible error in lower flowrates ranges Q ₁ ≤ Q < Q ₂	%	± 5								
Scale interval	m ³	0,001								
Scale interval in testing mode	m ³	0,000001								
Capacity of calculator	m ³	999999,999								
Capacity of calculator in testing mode	m ³	999,999999								
Accuracy class	-	2								
Mechanical class	-	M1								
Climatic class	°C	-15 to +70								
Electromagnetic class	-	E2								
Environmental classification	-	B/O								
Flow profile sensitivity class	-	U0D0								
Battery	-	li-battery 3,6 V, life time 16 years								



Tab. 4

Type /model	<i>QALCOSONIC W1</i>								
Nominal diameter DN	mm	32							
Permanent flowrate Q ₃	m ³ /h	6,3				10			
Minimum flowrate Q ₁	m ³ /h	0,079	0,040	0,0252	0,016	0,125	0,0625	0,025	
Transitional flowrate Q ₂	m ³ /h	0,126	0,063	0,040	0,026	0,200	0,100	0,040	
Overload flowrate Q ₄	m ³ /h	7,875				12,5			
Ratio Q ₃ /Q ₁	-	80	160	250	400	80	160	400	
Ratio Q ₂ /Q ₁	-	1,6							
Connection thread	-	G 1 ½							
Construction length L	mm	260							
Installation position	-	Horizontal / Vertical							
Water temperature range	°C	0,1 to 30 0,1 to 50 30 to 70 0,1 to 70							
Meter temperature class	-	T30 T50 T30/70 T70							
Maximum working pressure	bar	16							
Pressure loss ΔP	bar	0,16				0,25			
Maximum permissible error in upper flowrates range Q ₂ ≤ Q ≤ Q ₄	%	± 2 (at θ ≤ 30°C) ± 3 (at θ > 30°C)							
Maximum permissible error in lower flowrates ranges Q ₁ ≤ Q < Q ₂	%	± 5							
Scale interval	m ³	0,001							
Scale interval in testing mode	m ³	0,000001							
Capacity of calculator	m ³	999999,999							
Capacity of calculator in testing mode	m ³	999,999999							
Accuracy class	-	2							
Mechanical class	-	M1							
Climatic class	°C	-15 to +70							
Electromagnetic class	-	E2							
Environmental classification	-	B/O							
Flow profile sensitivity class	-	U0D0							
Battery	-	li-battery 3,6 V, life time 16 years							



Tab. 5

Type /model	<i>QALCOSONIC W1</i>												
Nominal diameter DN	mm	40											
Permanent flowrate Q ₃	m ³ /h	10			16				25				
Minimum flowrate Q ₁	m ³ /h	0,125	0,0625	0,040	0,200	0,100	0,064	0,040	0,3125	0,156	0,100	0,0625	
Transitional flowrate Q ₂	m ³ /h	0,200	0,100	0,064	0,320	0,160	0,102	0,064	0,500	0,250	0,160	0,100	
Overload flowrate Q ₄	m ³ /h	12,5			20,0				31,25				
Ratio Q ₃ /Q ₁	-	80	160	250	80	160	250	400	80	160	250	400	
Ratio Q ₂ /Q ₁	-	1,6											
Connection thread	-	G 2											
Construction length L	Mm	300											
Installation position	-	Horizontal / Vertical											
Water temperature range	°C	0,1 to 30 0,1 to 50 30 to 70 0,1 to.70											
Meter temperature class	-	T30 T50 T30/70 T70											
Maximum working pressure	Bar	16											
Pressure loss ΔP	Bar	0,16											
Maximum permissible error in upper flowrates range Q ₂ ≤ Q ≤ Q ₄	%	± 2 (at θ ≤ 30°C) ± 3 (at θ > 30°C)											
Maximum permissible error in lower flowrates ranges Q ₁ ≤ Q < Q ₂	%	± 5											
Scale interval	m ³	0,001											
Scale interval in testing mode	m ³	0,000001											
Capacity of calculator	m ³	999999,999											
Capacity of calculator in testing mode	m ³	999,999999											
Accuracy class	-	2											
Mechanical class	-	M1											
Climatic class	°C	-15 to +70											
Electromagnetic class	-	E2											
Environmental classification	-	B/O											
Flow profile sensitivity class	-	U0D0											
Battery	-	li-battery 3,6 V, life time 16 years											



4. Marking and inscriptions

The following data shall be marked on the water meter:

- a) name or trademark of the manufacturer;
- b) type name of the water meter;
- c) unit of measurement m^3 ;
- d) year of manufacture, the last two digits of the year of manufacture, or the month and year of manufacture;
- e) serial number (as near as possible to the indicating device);
- f) direction of flow, by means of an arrow (shown on both sides of the body or on one side only provided the direction of flow arrow is easily visible under all circumstances);
- g) flowrate Q_3 and ratio Q_3/Q_1 indicated as (R) followed by the ratio value;
- h) maximum admissible pressure (MAP);
- i) temperature class;
- j) pressure loss class (Δp);
- k) the latest date by which the meter shall be replaced;
- l) environmental classification;
- m) installation sensitivity class;
- n) electromagnetic environmental class;
- o) flow profile sensitivity class
- p) type approval sign according to national regulations.

5. Security measures

The water meter shall be protected against unauthorised manipulation and opening as follows:

- by the wire with a seal securing the connection between the upper cover and the housing;
- the meter casing is imperceptibly closed.

When the upper sealed cover is opened, the safety button that installed in the meter body is activated and error code appears on the meter display. (Fig.: 2).



6. Figures



Fig. 1a: Illustrative views of the water meters type QALCOSONIC W1 (design A)



Fig. 1b: Illustrative views of the water meters type QALCOSONIC W1 (design B)

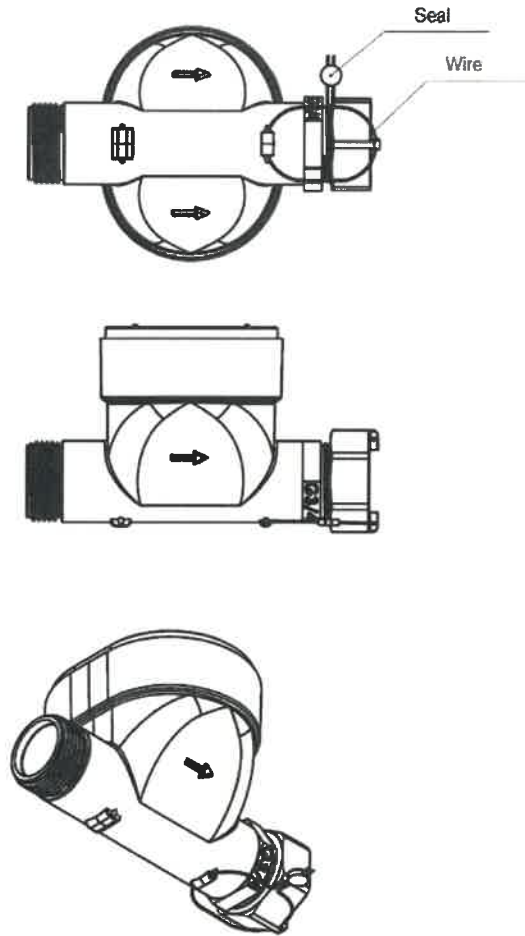


Fig. 2a) Sealing DN15 and DN20

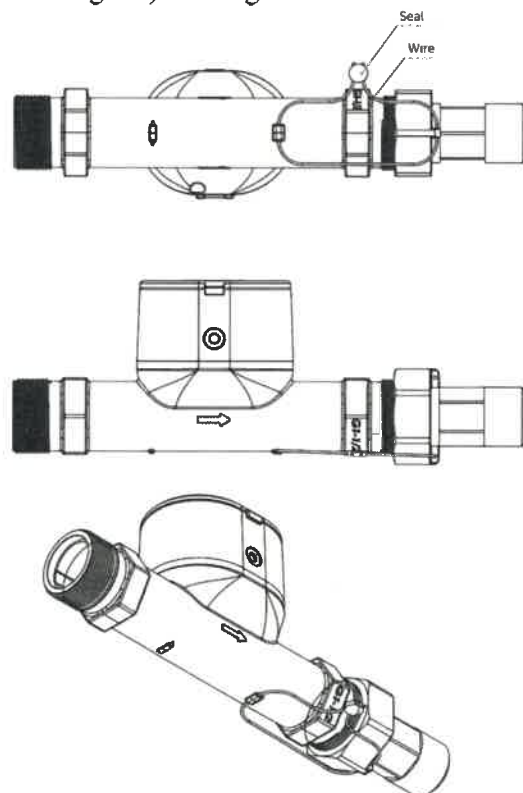


Fig. 2b) Sealing DN25 and DN32

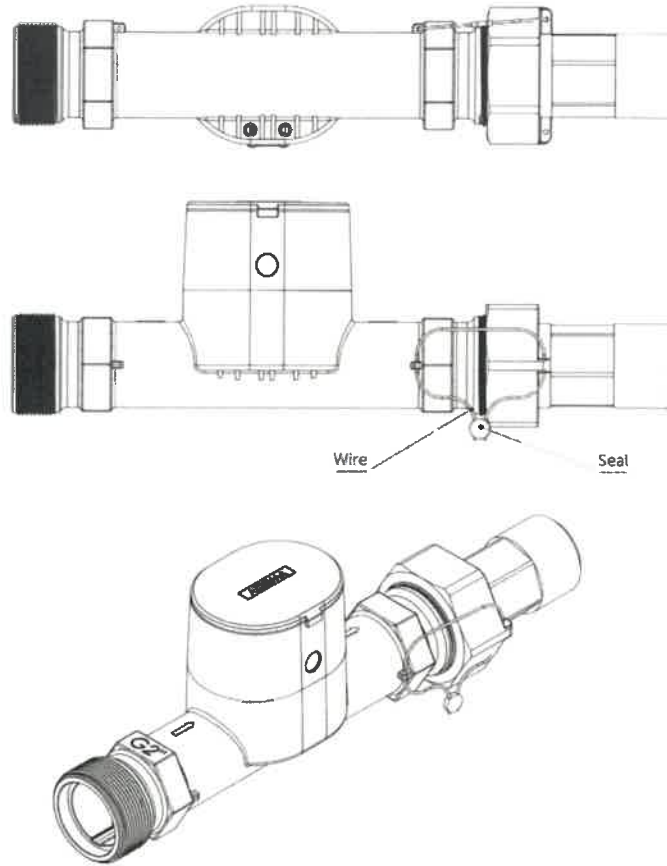


Fig. 2c) Sealing DN40

