

	
OIML Member State Japan	OIML Certificate No. R60/2000-A-JP1-22.02
OIML CERTIFICATE ISSUED UNDER SCHEME A	
OIML Issuing Authority Name: National Metrology Institute of Japan /National Institute of Advanced Industrial Science and Technology (NMIJ/AIST) Address: AIST Tsukuba Central 3, 1-1-1 Umezono Tsukuba Ibaraki 305-8563, Japan Person responsible: ISHIMURA Kazuhiko, President of AIST	
Applicant Name: Yamato Scale Co., Ltd. Address: 5-22 Saenba-cho, Akashi, 673-8688, Japan	
Manufacturer Name: Yamato Scale Co., Ltd. Address: 5-22 Saenba-cho, Akashi, 673-8688, Japan	
Identification of the certified type (the detailed characteristics will be defined in the additional pages) Digital Compression load cell Models: DCC21-12T, DCC21-24T, DCC21-36T QDCC21-12T, QDCC21-24T, QDCC21-36T, DCC2-50T	
Designation of the module (if applicable)	
This OIML Certificate attests the conformity of the above identified type (represented by the sample(s) identified in the OIML type evaluation report) with the requirements of the following Recommendation of the International Organization of Legal Metrology (OIML): OIML R 60 Edition: 2000 (E) for accuracy class C	

This OIML Certificate relates only to metrological and technical characteristics of the type of measuring instrument covered by the relevant OIML Recommendation identified above.

This OIML Certificate does not bestow any form of legal international approval.

The conformity was established by the results of tests and examinations provided in the associated OIML type evaluation report:

No. 2022-001, dated 1 July 2022, that includes 5 pages

The technical documentation relating to the identified type is contained in documentation file:

No. 2022-001-D, dated 1 July 2022

OIML Certificate History

Revision No.	Date	Description of the modification
Revision 0	7 July 2022	OIML Certificate first issued
-	-	-
-	-	-
-	-	-


This revision replaces previous versions of the certificate.

Identification, signature and stamp
The Issuing Authority
NMIJ/AIST

The OIML Member

ISHIMURA Kazuhiko
President of AIST
7 July 2022

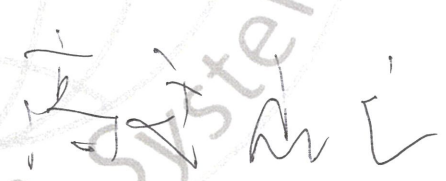


TAKATSUJI Toshiyuki
7 July 2022

The accreditation body:

NMIJ/AIST has achieved accreditation under the ASNITE-Product (OIML) scheme of IAJapan, which applies ISO/IEC 17065:2012 and regulations relevant to OIML-CS as the accreditation criteria. The accreditation identification for this accreditation is ASNITE 0001 Product and the details of the accreditation information could be referred from the IAJapan website (<https://www.nite.go.jp/en/iajapan/asnite/lab/index.html>).

Important note:

Apart from the mention of the Certificate's reference number and the name of the OIML Member State in which the Certificate is issued, partial quotation of the Certificate and of the associated OIML type evaluation report(s) is not permitted, although either may be reproduced in full.

DESCRIPTIVE ANNEX

Characteristics of the Load cell:

Model designation		DCC21-12T QDCC21-12T	DCC21-24T QDCC21-24T	DCC21-36T QDCC21-36T	DCC2-50T	Units
Classification		C				
Maximum capacity	E_{max}	12	24	36	50	t
Maximum number of verification scale intervals	n_{LC}		6 000 5 000 4 000 3 000		5 000 4 000 3 000	
Relative v_{min} (ratio to minimum load cell verification interval)	Y		12 000		10 000	
Relative DR (ratio to minimum dead load output return)	Z		6 000 5 000 4 000 3 000		5 000 4 000 3 000	
Minimum dead load	E_{min}		0			kg
Safe load limit	$\% \cdot E_{max}$		150			%
Maximum excitation voltage			15			V DC
Temperature range	T		-10 / +40			°C
Fraction	p_{LC}		0.7			
Humidity Class			CH			
Transducer material			steel			
Atmospheric protection			IP68			

Characteristics of load cell cable:

The cable has 4-wire plus shield. The ground is open at the load cell end. Electrical connectors: 4-wire with shield, Specification as follows:

Excitation +	Red
Excitation -	Black
Signal +	White
Signal -	Green
Shield	Grey
Cable length	20 m